


# PETCLIP™ Acoustic Panel Installation System

Our patented PETClips are designed for fast, easy, and secure installation of our PolySorb polyester acoustical panels. These clips are made of strong, durable, galvanized steel with 2 and 4 aggressive prongs for quick and permanent installation. Our PETClips work for both wall and ceiling installation of 1" and 2" polyester panels.

Packaging Information:  
Standard 1" has 500 per Box  
Standard 2" has 200 per Box

Dimensions:  
1" x 1" and 2" x 2" Base  
2 & 4 Spikes (1" - 2" Long)  
Fastener Holes

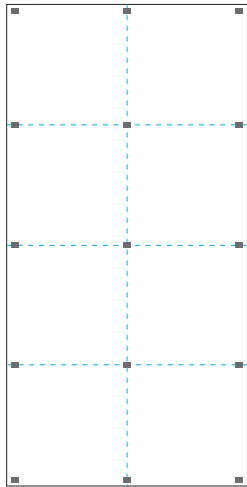

Install at least 4 PETClips a minimum of 24" OC in a grid pattern per panel. A standard 2ft x 4ft panel will require 4-6 clips while a 4ft x 8ft panel will require 16-24 clips.

(Keep 3" to 6" from perimeter)


Temporarily hold the acoustic panel in place on the wall and lightly mark the placement of the panel with a pencil.

Position PETClips 1-1/2" inboard from finished panel dimensions to determine the location of the clips.

PETClips have two centered fastener holes to fasten to the wall or ceiling. Use a common drywall screw to fasten the clips to the substrate.

Once all other clips are installed, hold the panel firmly against the PET clips and strike the finished panel face with medium force at each clip using a non marking rubber mallet.

For a permanent installation, beads of construction grade adhesive caulking can be applied to the wall before impaling the panel onto the clips.

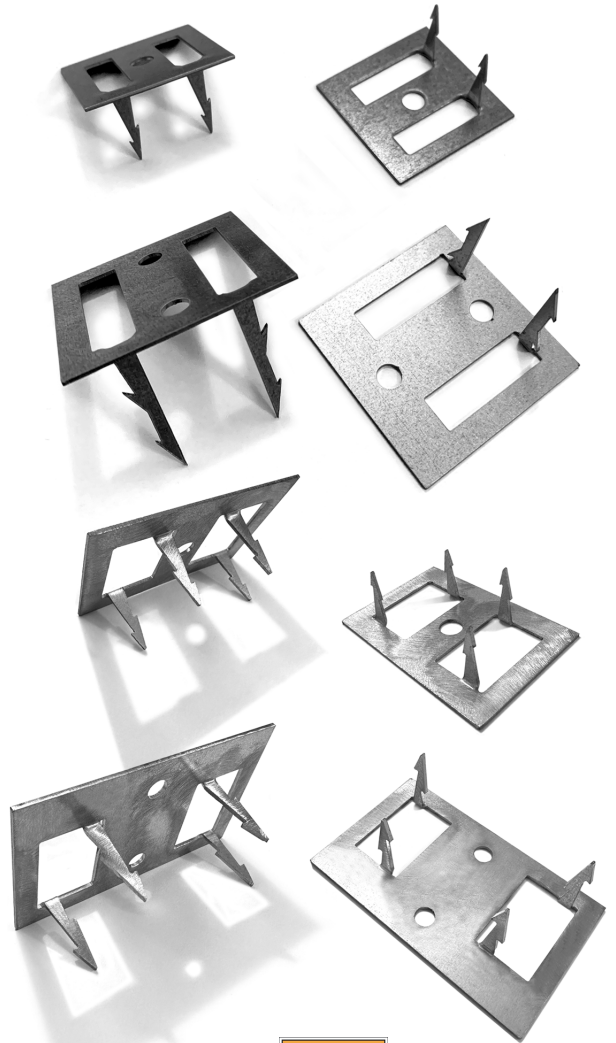

PolySorb, LLC  
1143 NW 52nd Street  
Seattle, WA 98107

**206-571-5710**

[www.polysorb.com/patents](http://www.polysorb.com/patents)

  
**POLYSORB**  
Architectural Audio Absorption Solutions  
[www.polysorb.com](http://www.polysorb.com)